

扁圆头铆钉

Flat round head rivets

1 引言

本标准规定了公称直径 $d = 1.2 \sim 10\text{mm}$ 的扁圆头铆钉。

2 引用标准

GB 116—86 铆钉技术条件。

3 尺寸

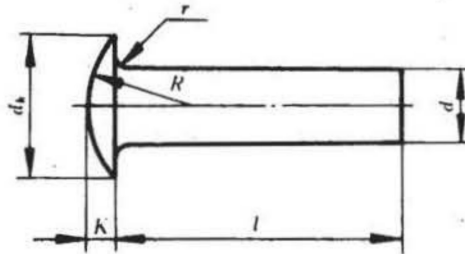


表 1

mm

	公称	(1.2)	1.4	(1.6)	2	2.5	3	(3.5)	4	5	6	8	10
d	max	1.26	1.46	1.66	2.06	2.56	3.06	3.58	4.08	5.08	6.08	8.1	10.1
	min	1.11	1.31	1.51	1.91	2.41	2.91	3.42	3.92	4.92	5.92	7.9	9.9
d_k	max	2.6	3	3.44	4.24	5.24	6.24	7.29	8.29	10.29	12.35	16.35	20.42
	min	2.2	2.6	2.96	3.76	4.76	5.76	6.71	7.71	9.71	11.65	15.65	19.58
K	max	0.6	0.7	0.8	0.9	0.9	1.2	1.1	1.5	1.9	2.4	3.2	4.24
	min	0.4	0.5	0.6	0.7	0.7	0.8	1	1.1	1.5	2	2.8	3.76
r	max	0.1	0.1	0.1	0.1	0.1	0.1	0.3	0.3	0.3	0.3	0.3	0.3
R	=	1.7	1.9	2.2	2.9	4.3	5	5.7	6.8	8.7	9.3	12.2	11.5

注：尽可能不采用括号内的规格

表 2

mm

公称	<i>l</i>		<i>d</i>											
	min	max	(1.2)	1.4	(1.6)	2	2.5	3	(3.5)	4	5	6	8	10
1.5	1.3	1.7												
2	1.8	2.2												
2.5	2.3	2.7												
3	2.8	3.2												
3.5	3.26	3.74												
4	3.76	4.24												
5	4.76	5.24												
6	5.76	6.24				通								
7	6.71	7.29					用							
8	7.71	8.29						规						
9	8.71	9.29							格					
10	9.71	10.29												
11	10.65	11.35												
12	11.65	12.35												
13	12.65	13.35												
14	13.65	14.35								范				
15	14.65	15.35												
16	15.65	16.35									围			
17	16.65	17.35												
18	17.65	18.35												
19	18.58	19.42												
20	19.58	20.42												
22	21.58	22.42												
24	23.58	24.42												
26	25.58	26.42												
28	27.58	28.42												
30	29.58	30.42												
32	31.5	33.5												
34	33.5	34.5												
36	35.5	36.5												
38	37.5	38.5												
40	39.5	40.5												
42	41.5	42.5												
44	43.5	44.5												
46	45.5	46.5												
48	47.5	48.5												
50	49.5	50.5												

注：尽可能不采用括号内的规格

GB 871-86

4 技术条件按 GB 116-86 规定

5 标记

公称直径 $d = 10\text{mm}$ 、公称长度 $l = 40\text{mm}$ 、材料为 ML 2、不经表面处理的扁圆头铆钉的标记

示例:

铆钉 GB 871-86-10×40

附加说明: